


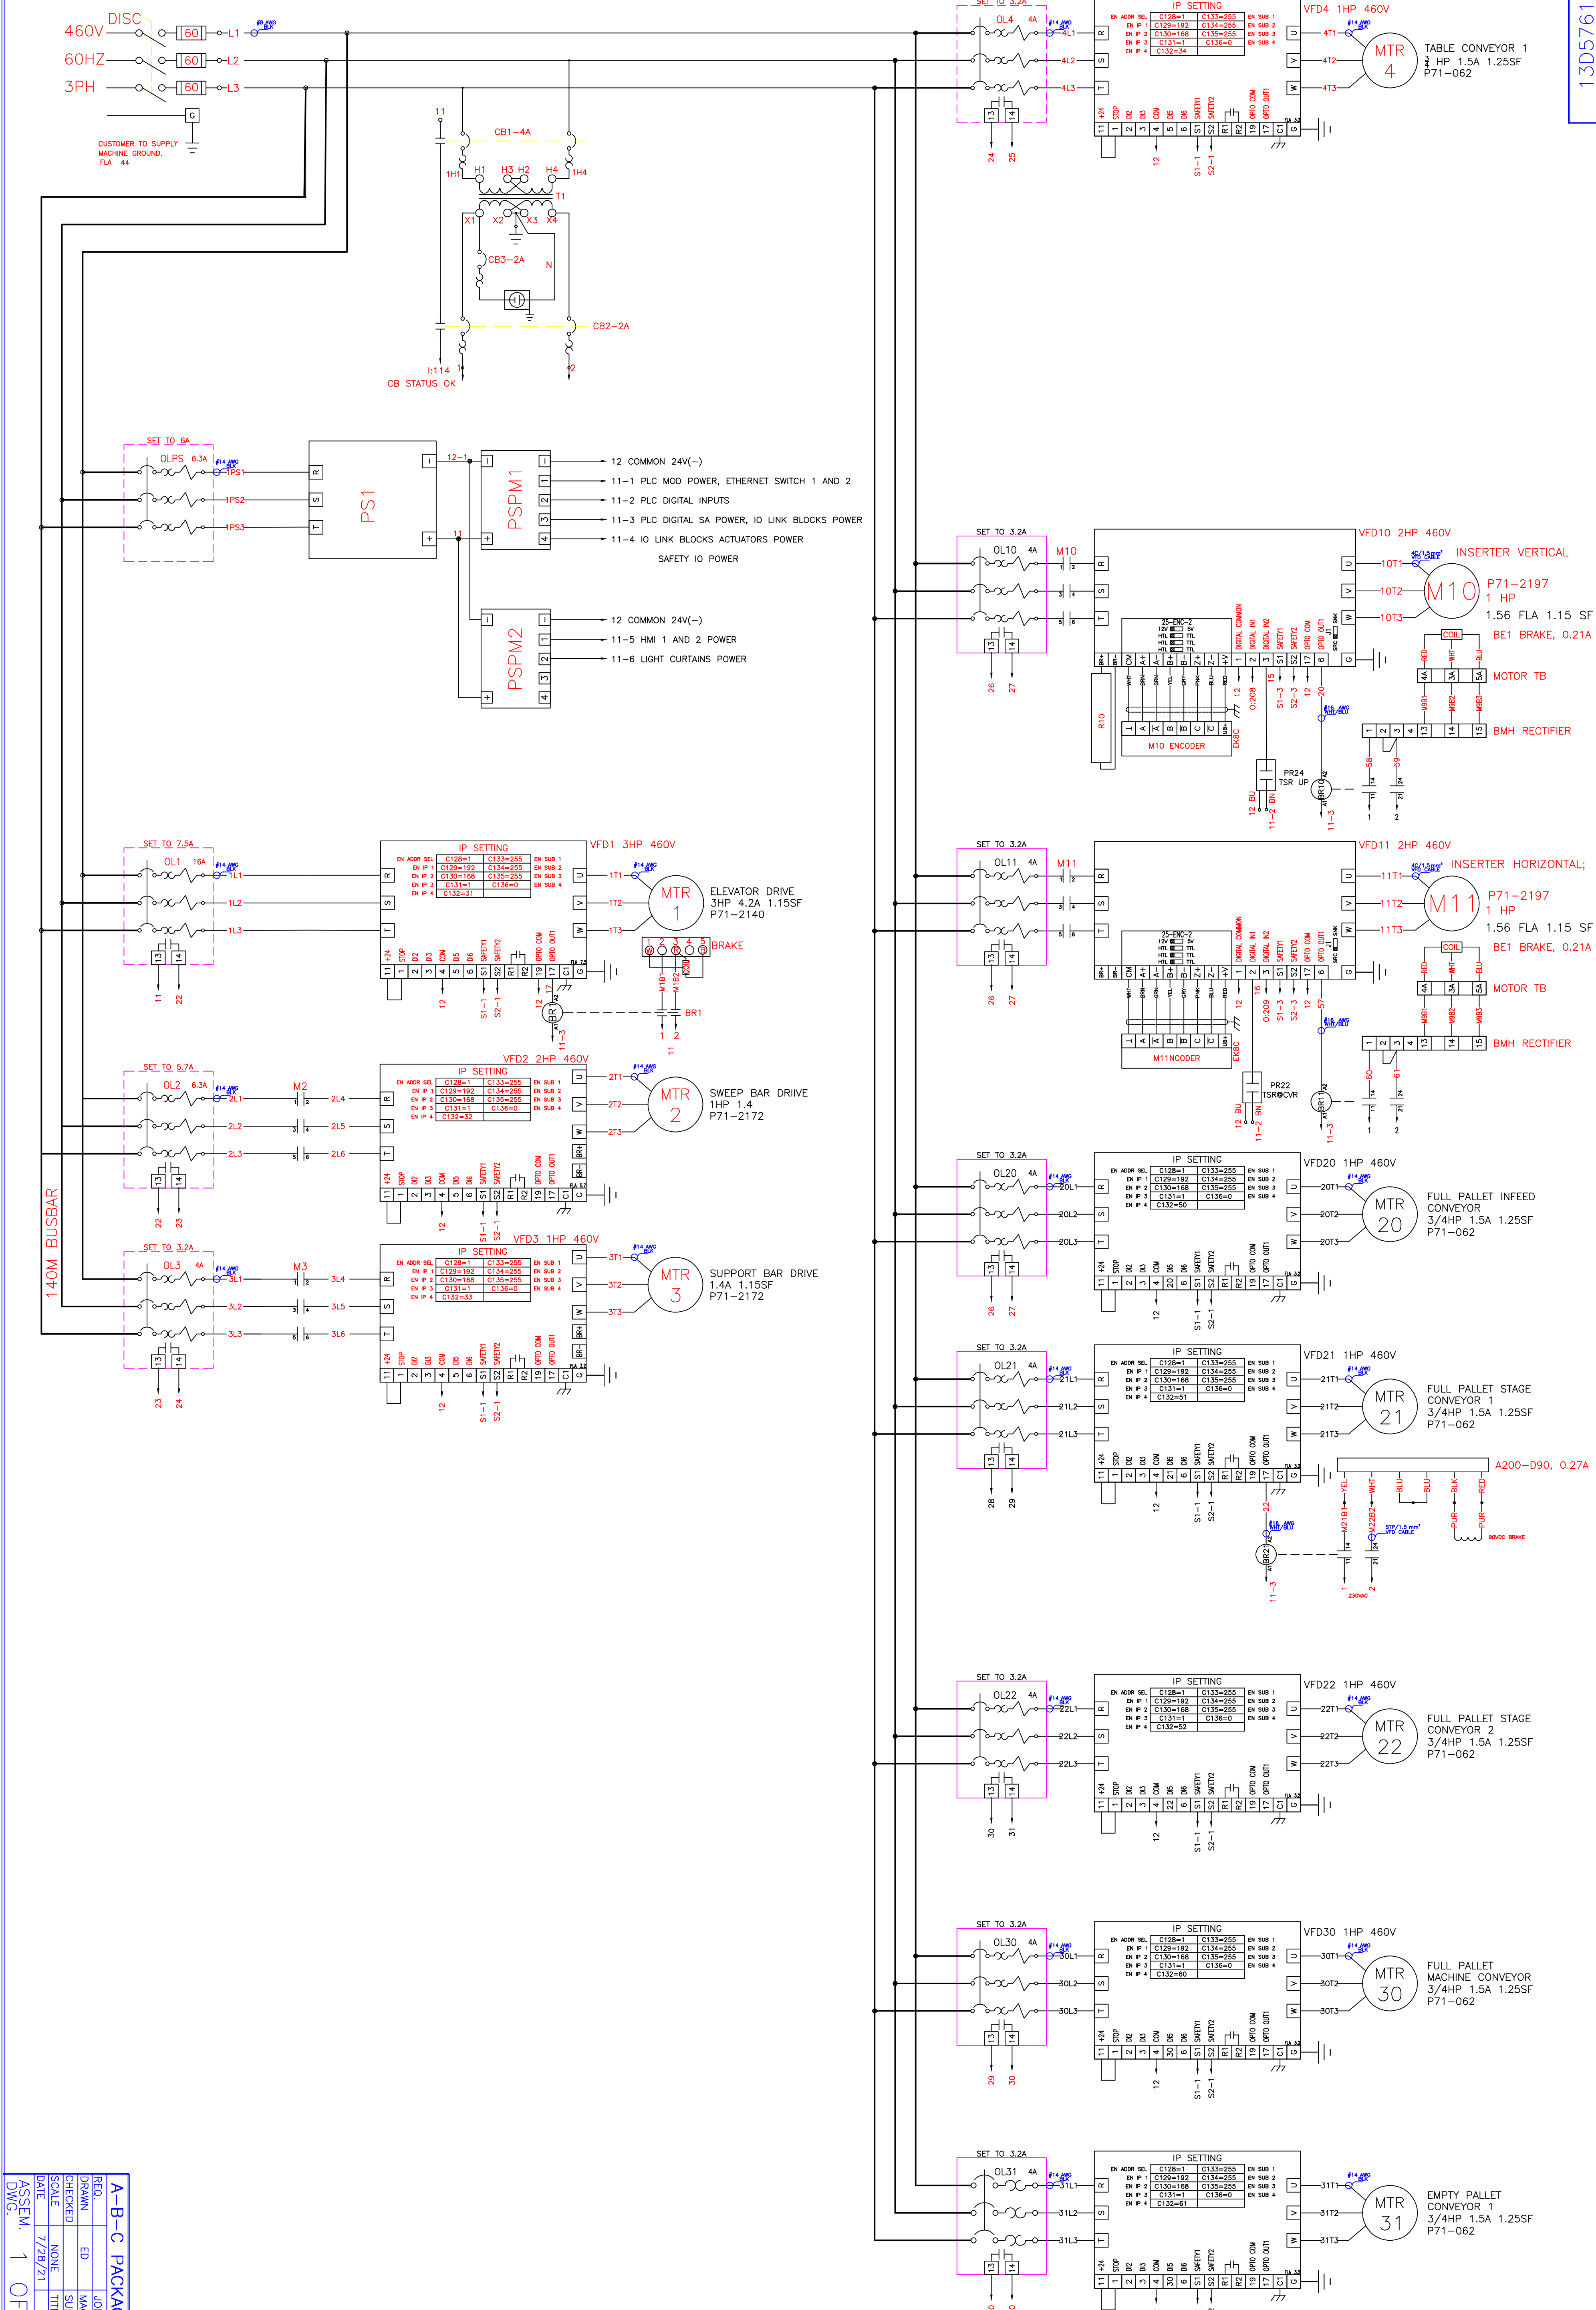

430.9(C) Torque Requirements. Control circuit devices with screw-type pressure terminals used with 14 AWG or smaller copper conductors shall be torqued to a minimum of 0.8 N·m (7 lb-in.) unless identified for a different torque value.

A-B-C PACKAGING MACHINE CORPORATION			
REQ.	ED	JOB 24464	CO. BLUE MARBLE
DRAWN		MACHINE	108
CHECKED		SUBDIVISION	ELECTRICAL
SCALE	NONE	TITLE	WIRING DIAGRAM - POWER
DATE	7/28/21		460VAC/60HZ/3PH/240VC
ASSEM.	1	OF 7	DWG. 13D5761
DWG.			NO.